Kitchen Hanger Installation Manual

KC-01

※Please read the installation instructions before proceeding with the installation.
Please hand this manual to the end user after installation.

◎Installation Procedure

①（Wall Installation）
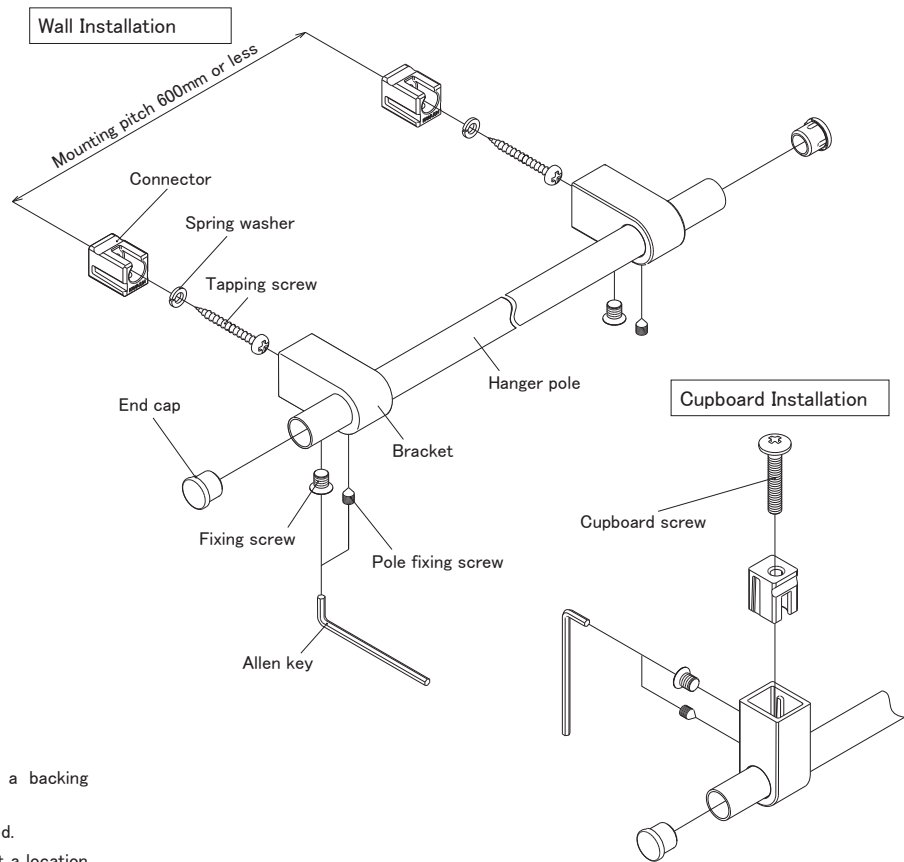Determine the mounting position and attach the connectors with the tapping screws and spring washers.

（Cupboard installation）

Determine the mounting position and attach the connectors with cupboard screws.

②After inserting the hanger pole through the brackets, use the fixing screws to attach the assembly onto the connectors.

③Ensure the hanger pole is straight before securing with the fixing screw.

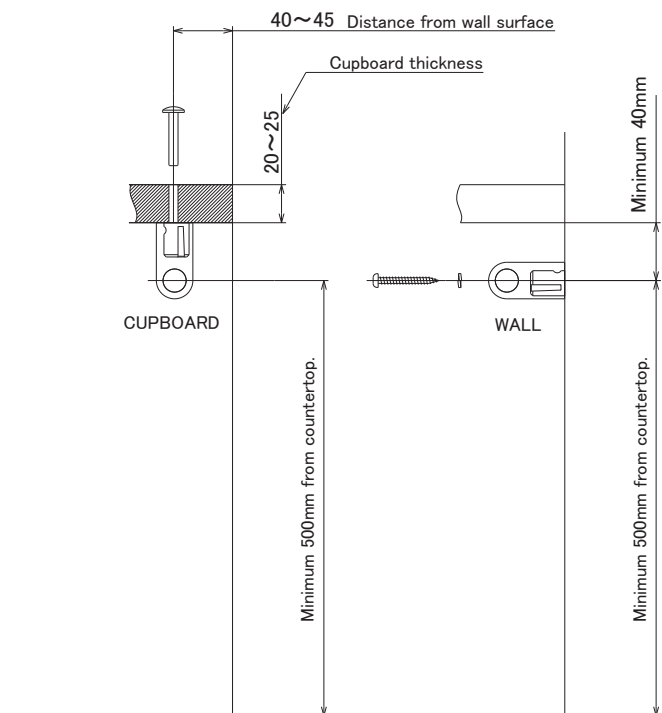④Complete the installation by securing the end caps to both ends of the hanger pole.

Wall Installation

Mounting pitch 600mm or less

Connector

Spring washer

Tapping screw

Hanger pole

End cap

Bracket

Fixing screw

Pole fixing screw

Allen key

Cupboard Installation

Cupboard screw

⚠ Precautions for Installation

●When mounting on plasterboard, etc., use a backing surface of at least 12mm.
※Do not install on a wall that is not reinforced.

●When mounting on a cupboard, etc., install at a location with reinforced material.
※Do not install on a hollow structure.

●The mounting pitch should be 600mm or less.

●After installation, be sure to check that the product is completely secured in place. Incomplete installation may cause the product come loose and fall, resulting in injuries.

●Do not install product in environments exposed to water or moisture. Corrosion may occur, resulting in product failure and possible risks of injury.

⚠ Precautions for Usage

●The load capacity of this product is 10kgf. Loads heavier than the stated load capacity may result in product failure and possible risks of injury.

●Do not use the product for any other purpose. Failure to do so may result in damage and injury.

●To clean this product, wipe it lightly with a soft, dry cloth. If the product is heavily soiled, wipe it with a cloth containing water or neutral detergent diluted with water (about 5~10%), and then wipe it dry with a dry cloth. Do not use benzine, thinner, alcohol, toilet detergent, fungicide,

Mounting Position Reference Drawing

40~45 Distance from wall surface

Cupboard thickness

20~25

Minimum 40mm

CUPBOARD

WALL

Minimum 500mm from countertop.

Minimum 500mm from countertop.

※Cannot be installed on hollow structure, etc.

KAWAJUN
www.kawajun.co.jp

NO. 003